

# FEA and Optimization of Catalyst Bed Reactor Vessel

Navin S. Nagpurkar

Alard college of engineering and management  
Pune, India

Email-id: naviinnngp@gmail.com

Prof. N. H. Ambhore

V.I.I.T.,  
Pune, India

**Abstract**— A Catalyst Bed Reactor (CBR) is a reactor compartment incorporated in a pressure vessel that can be used to carry out a variety of multiphase chemical reactions. In this type of reactor, a fluid (gas or liquid) is passed through a granular solid material (usually a catalyst possibly shaped as tiny spheres) at high enough velocities to suspend the solid and cause it to behave as though it were a fluid.

Catalyst bed is a popular technique to speed up chemical processes. However current designs of a bed are stagnant designs where the chemical reaction occurs while the fluid is stationary, as if in a storage vessel. This process is time expensive and hence there is need of speeding up the process in which the fluid flow is present. This can be achieved in a reactor vessel where the Catalyst bed is embedded in the design.

This design has its own challenges. When the reaction takes place, some quantity of the catalyst stagnates, and this stagnation has to be removed, which is done using inclined nozzles. These inclined nozzles are a design headache as they create a lot of stress zones. Thus, our objective is to find out the best solution out for this problem so as to enhance the process and to get the best results while performing actual analysis for the vessel under consideration.

**Keywords-** Pressure vessels, Nozzles, Reactor vessel, FEA, Optimization, Stress distribution, Stress concentration, Stress concentration factor, Deformation, Equivalent Von Mises stresses.

\*\*\*\*\*

## I. INTRODUCTION

Pressure vessel

A pressure vessel is a closed container designed to hold gases or liquids at a pressure substantially different from the ambient pressure. Pressure vessels are used in a variety of applications. These include the industry and the private sector. They appear in these sectors respectively as industrial compressed air receivers and domestic hot water storage tanks, other examples of pressure vessels are diving cylinder, recompression chamber, distillation towers, autoclaves and many other vessels in mining or oil refineries and petrochemical plants, nuclear reactor vessel, habitat of a space ship, habitat of a submarine, pneumatic reservoir, hydraulic reservoir under pressure, road vehicle airbrake reservoir and storage vessels for liquefied gases such as ammonia, chlorine, propane, butane and LPG [1].

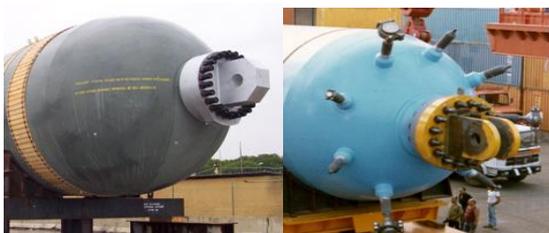


Figure 1: Pressure vessels [2]

### Nozzle

In pressure vessels, nozzles are required for inlet and outlet of fluid. Pressure vessels find wide applications in thermal and nuclear power plants, process and chemical industries, in

space and ocean depths, and fluid supply systems in industries. Due to practical requirements, pressure vessels are often equipped with nozzles of various shapes, sizes and positions, at various angles.

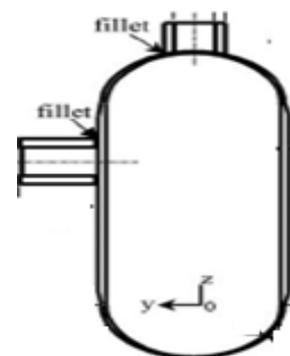


Figure 2: Nozzles welded cylindrical pressure vessel (Cross section) [3]

A nozzle is a cylindrical component that penetrates the shell or heads of a pressure vessel. The nozzle ends are usually flanged to allow for the necessary connections and to permit easy disassembly for maintenance or access. However sometimes process requirements dictate that some nozzles be placed on the periphery of the pressure vessel [4].

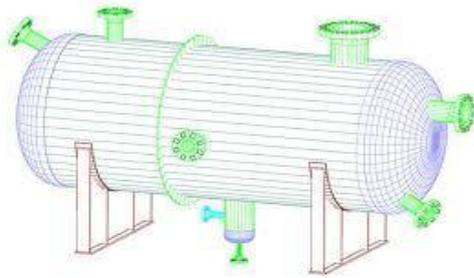


Figure 3: Pressure vessel model with nozzles on the periphery [5]

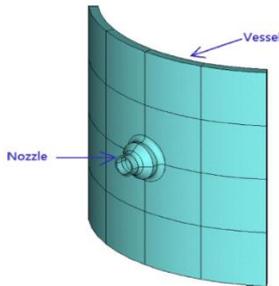


Figure 4: Section of Reactor pressure vessel with a protruding nozzle [6]

Nozzle is a part designed to control the direction or characteristics of fluid (especially to increase velocity) as it exits (or enters) an enclosed chamber or pipe. Under different loading conditions, the stress will occur at the nozzle to head or shell junction area. Thus reliable and accurate design calculation for head or shell to nozzle junction is necessary. The calculation for nozzle design gives the information whether the design is adequate for given parameters. The figures below shows various types of nozzle geometries incorporated on the vessel. Two types of intersecting structures, distinguished by flush and protruding nozzles. It is shown that the design with a protruding nozzle would produce a better stress distribution than the design with a flush nozzle [7]

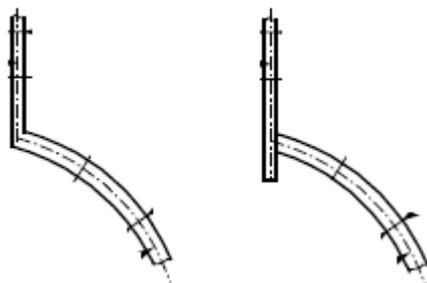


Figure 5: Section of pressure vessels with a flush and a protruding nozzle [7]

When the head is provided with a nozzle, the stress in the head/nozzle connection remains high and may be reduced with the help of other means. The zone of the head/nozzle connection is subject to disturbance of the membrane stress state existing in the vessel. In the case of symmetrical location of the nozzle, i.e. when the vessel axis and nozzle axis are identical, the stress distribution may be determined analytically (Magnucki, 1998). Otherwise, when both

symmetry axes are shifted one with respect to another, the analytical approach would be extremely difficult [8].

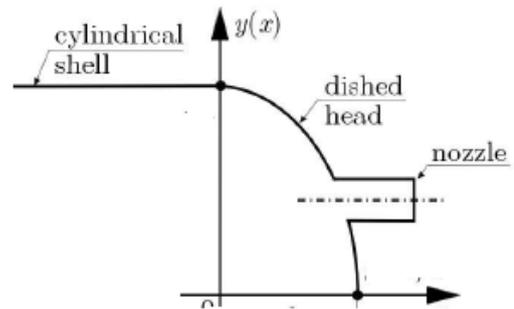


Figure 6: Pressure vessel with head and protruding nozzle [8]

### Catalyst Bed Reactor

The reactor pressure vessel (RPV) is the central and the most important component of the pressurized reactor vessels since it contains mechanisms at high temperature and under high pressure. Almost all industrial pressure vessels including the RPV have openings, nozzles and other attachments which produce geometric discontinuities in them. The effect of stress concentration because of geometric discontinuities is one of the basic considerations in the design of pressure vessels. These geometric discontinuities alter the stress distributions in the localized area [9].

A Catalyst Bed Reactor (CBR) is a type of reactor device that can be used to carry out a variety of multiphase chemical reactions. Catalyst bed is a popular technique to speed up chemical processes. However current designs of a bed are stagnant designs where the chemical reaction occurs while the fluid is stationary, as if in a storage vessel. This process is time expensive and hence there is need of speeding up the process in which the fluid flow is present. This can be achieved in a reactor vessel where the catalyst bed is embedded in the design. As the reaction takes place, some quantity of the catalyst stagnates, and this stagnation has to be removed, which is done using inclined nozzles. In this subject, these inclined nozzles are of primary interest for their locations in the vessel as we have to look after the symmetry and stresses generated in the vessel because of them.

### II. PROBLEM STATEMENT AND METHODOLOGY

Catalyst bed reactors are mostly used to speed up the chemical processes. But if the designs of bed are stagnant designs then fluid becomes stationery and it results in slowing down the chemical reaction, which usually occurs in storage vessel. While going through all the paper listed above, it was found that there was no such design till date which will avoid the slowing down of the chemical reaction of the reactor vessel and enhance or speed up the chemical reaction happening inside of the vessel.

Thus there is need of speeding up this process which can be achieved in a in a reactor vessel where our catalyst bed is embedded in the design. This bed has inclined nozzles which are our primary interest and these are design difficulties as they create a lot of stress zones and may disturb the symmetry of the vessels too.

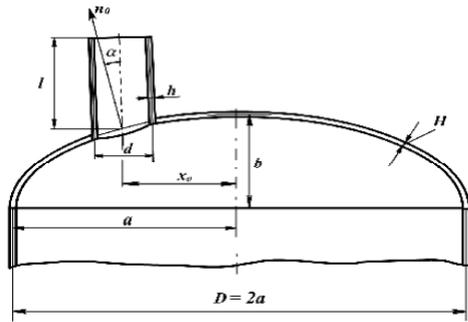


Figure 7: Ellipsoidal head & nozzle shell intersection (Unsymmetrical geometry) [10]

**Objective**

We will be dealing with FEA (Finite element analysis method) for below objectives;

1. To design a pressure vessel incorporated with nozzles and find out the required thickness for the vessel.
2. To conduct the static structural stress analysis of the pressure vessel and nozzles at given angular positions
3. To find out the optimum thickness for the vessel at which vessel will be stabilized in terms of deformation and stresses generated.

**Methodology**

The route followed to accomplish the objective is shown with help of flow chart below

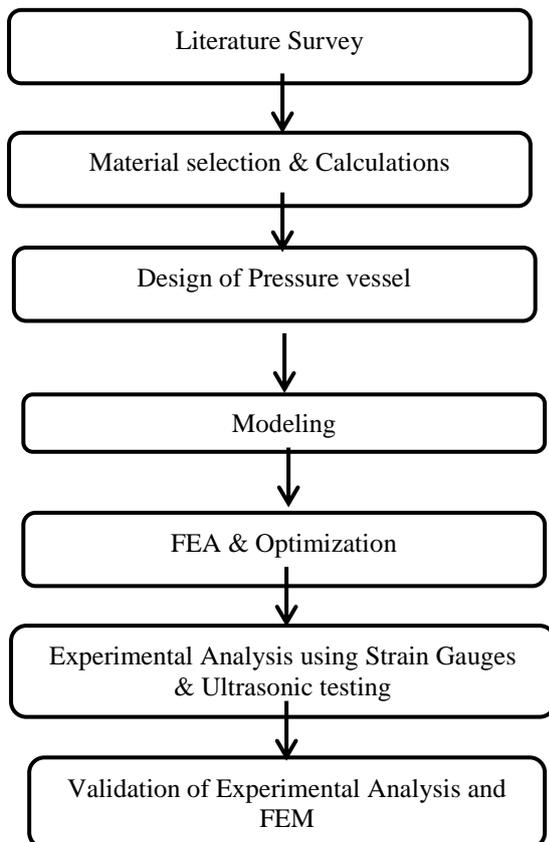


Figure 8: Flow chart

**III. FINITE ELEMENT ANALYSIS**

Finite element analysis (FEA) is a fairly recent discipline crossing the boundaries of Mathematics, physics, engineering, and computer science. The method has wide application and enjoys extensive utilization in the structural, thermal and fluid analysis areas. Finite element analysis (FEA) is a computer based numerical technique for calculating the strength and behavior of engineering structure. It can be used to calculate deflection, stress, vibration, buckling behavior and many other phenomena [13]. It also can be uses to analyze either a small or large scale deflection under or applies displacement. It uses a numerical technique called the finite element analysis method (FEA). In finite element method, the actual continuum is represented by the finite element. These elements are considered to be joined at specified joints called nodes or nodal solution. As the actual variation of the field variables (like displacement, temperature and pressure or velocity) inside the continuum is not known, the variation of the field inside a finite element is approximately by a simple function. The approximating functions are also called as interpolation models and are defined in terms of field variables at nodes. When the equilibrium equations for the whole continuum are known, the unknowns will be the nodal values of the field variable. In this dissertation work finite element analysis was carried out using FEA software ANSYS.

The finite element method is comprised of three major phases

**Preprocessing**

The preprocessing step is, quite generally, described as defining the model and includes

1. Define the geometric domain of the problem.
2. Define the element type(s) to be used.
3. Define the material properties of the elements.
4. Define the geometric properties of the elements (length, area, and the like).
5. Define the element connectivity (mesh the model).
6. Define the physical constraints (boundary conditions).
7. Define the loadings.

The preprocessing (model definition) step is critical. In no case is there a better example of the computer-related axiom “garbage in, garbage out.” A perfectly computed finite element solution is of absolutely no value if it corresponds to the wrong problem.

**Solution**

During the solution phase, finite element software assembles the governing algebraic equations in matrix form and computes the unknown values of the primary field variable(s). The computed values are then used by back substitution to compute additional, derived variables, such as reaction forces, element stresses, and heat flow.

**Post processing**

Analysis and evaluation of the solution results is referred to as post processing. Postprocessor software contains sophisticated routines used for sorting, printing, and plotting selected results from a finite element solution. Examples of operations that can

be accomplished include

1. SFD,BMD,AFD
2. Check equilibrium
3. Plot deformed structural shape
4. Animate dynamic model behavior
5. Produce color coded temperature plots

While solution data can be manipulated many ways in post processing, the most important objective is to apply sound engineering judgment in determining whether the solution results are physically reasonable.

#### IV. MODEL SELECTION AND FEA OF CATALYST BED REACTOR VESSEL

##### Modelling

The first step of pre-processing is to generate the 3-D model of the given component which is compatible to import in the solver. The 3-D model of the Pressure vessel is created in Ansys 15 work bench using the dimensions calculated in the previous chapter and using some input given by the company. The model of vertical pressure vessel is shown in Figure 4.3. These files were used for further analysis process. The two nozzles were added in the model at 45° to the vertical vessel. The intention of the addition of the nozzles is to enhance the chemical reaction occurring in the catalyst bed reactor vessel. The concept of the inclined nozzles is to speed up the flow of the fluid coming from the entry nozzle thus adding extra velocity to the flow. This way, we can remove the stagnation of the reaction happening in the catalyst bed.

The first vessel model was created for the vertical erection and to achieve this erection, the skirt support was provided. But, keeping an eye on horizontal pressure / load i.e. 41 km/hr, it was analyzed for the vertical stability of the vessel and the images below shows the results we got. It can be clearly seen that vessels are not able to sustain the horizontal wind load of 41 km/hr and hence it was suggested to lay the vessel in horizontal position. Therefore, as per the recommendation we need to incorporate the saddles for the horizontal support. Saddles are provided to lay the pressure vessel in horizontal position, since pressure vessel was unable to withstand the horizontal wind loads and the generated equivalent stress and the deformation were more than the allowable values. Snaps are taken from Ansys to reflect the results for the vertical instability of the vessel (Refer figure 4.5).

The next step involved with the horizontal pressure vessel was to design the saddle supports for the vessel. Looking at the large height (now length) of the vessel 3 saddles were recommended to support the vessel [24]. The saddles were designed are now working as supports.

This horizontal vessel was then checked for stability. All the boundary conditions like pressure, standard Earth gravity, force were added and all the supports were fixed. Modal was solved with all these conditions. It was solved for deformation and equivalent Von Mises stresses and the results were obtained. But the issue happened with this case was the frequency of the model was coming out to be zero.

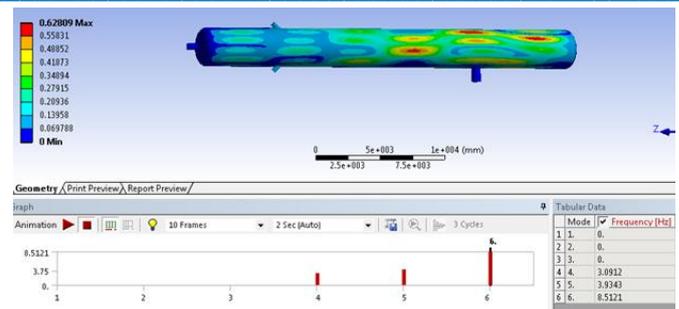


Figure 9: Pressure vessel with zero frequency

The figure 9 shows the model deformation, frequency graph and chart at an actual scale. The first three frequency are coming out to be zero. But every single object in our day to day life must have some frequency. The zero frequency means it is in space.

To correct the discrepancy, this issue is checked for the contact of the elements created while modelling. All the contacts were detected and the issue was resolved. Then, again the solve command was given and now the results were obtained with the non zero frequency. This is known as model validation and hence, now we can further proceed with the analysis of the vessel.

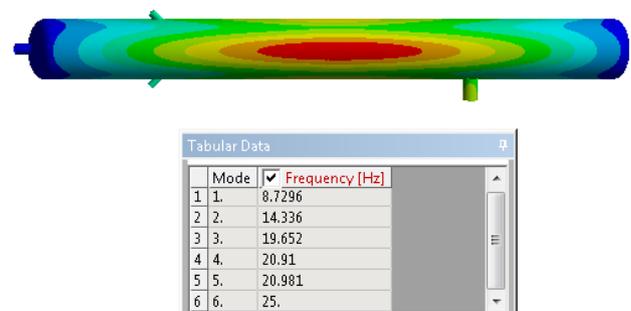


Figure 10: Pressure vessel with nonzero frequency (Valid model)

Figure 10 shows the deformation of the model at the true scale. Nonzero frequency makes it sure that the model is valid and hence, we can proceed with the further analysis for the project. The red zone in middle is showing higher values of deformation due to temperature 200°C at which the catalyst bed reactor will be under operation. So, reducing this deformation to normal and uniform values comparable to other sections of the vessel will be point of interest.

Thus, we need to locate the area of the catalyst bed reactor vessel. The greenish area shown in the middle of the vessel below reflect our catalyst bed area. It is imparted a temperature of 200°C to match the exact environmental conditions of the actual catalyst bed reactor area.



Figure 11: Pressure vessel model with Catalyst bed reactor section

Figure 11 is the final model showing the position of the nozzles and a general structure of the vessel. Out of three sections, the middle section will be taking care of the Catalytic bed reactor. The inclined nozzles will inject the fluid at a velocity which will be different from the velocity of the fluid

coming from the nozzle located on the ellipsoidal head. Nodes generated are 33987, the sizing kept for meshing the whole model was 100 mm

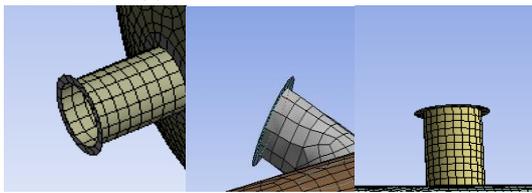


Figure 12: Meshing at nozzles

Snap above depicts the mesh generated near the nozzle geometry.

The boundary conditions applied are listed below

1. Pressure =  $-396320 \text{ Pa}$  on all the surfaces of the vessel. (Represented with red arrows in first snap) the negative sign shows that the pressure is applied from inside in outward direction. The red vessel indicates the pressure applied onto the vessel. The arrows are seen inward from the vessel surface implies the pressure acting inward.



Figure 13: Vessel with pressure acting outward

2. Standard Earth gravity is applied and represented with the yellow arrow in snaps below and this will count the force due to weight of the vessel.

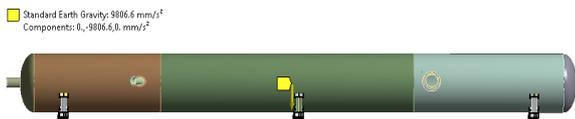


Figure 14: Vessel showing Earth gravity in downward direction

3. The saddle support bases are kept as fixed supports.
4. The edges of all the nozzles are also kept as fixed supports.

**Meshing**

A generalized meshing is shown in the below snap. The image shows the section of the pressure vessel including the cut section of the nozzle.

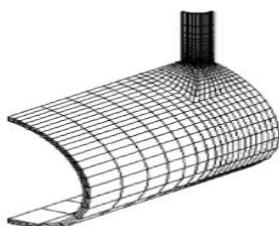


Figure 15: Finite element meshing [14]

The meshing is done with mesh size of 100 mm for cylinder and the saddle supports. The mesh is not over fined.



Figure 16: Meshing of the vessel (body sizing 100 mm)

Also, the Map faced meshing is done at the reinforcement pads for removing non regularity in meshing which affects the end results. The mesh type is Quadrilateral-mesh. Fine mesh is done to get the accurate values of stresses in those regions. This can be viewed in Figure 16, (Nodes- 33987 & Elements- 32947). The material used for pressure vessel is SA 516 Grade 70 (Carbon steel plate) is shown in Table 1.

Table 1: Final material description

Description	Values
Material	SA 516 Grade 70
Poisson's ratio	0.29
Allowable stress	137.8951 MPa

**Dead weight loading conditions**

After the validation of the vessel, the next step was to analyze the vessel with dead weight loading conditions. The load by acceleration due to gravity is applied to find the total deformation and equivalent Von Mises stresses. As shown in above figure, the standard earth gravity  $9806.6 \text{ mm/s}^2$  is applied downward. The fixed support is given to the middle saddle and the end saddle supports were imparted displacements. Nozzles were kept free. No other force or pressure was applied from inside or outside and no thermal conditions were considered for the dead weight loading. The thickness of the vessel was kept 12 mm and the analysis was carried out.

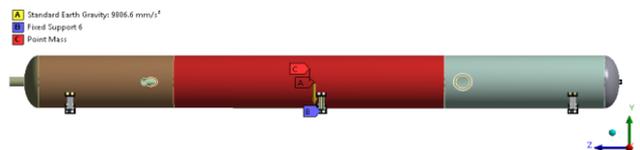


Figure 17: Dead weight loading (DWL) conditions

It is clearly seen in the above image, standard Earth gravity (A) is acting downward on the vessel i.e. weight of the vessel. After applying the above inputs, the results for Equivalent Von Mises stresses and deformation were noted. The following images were taken to capture the results generated. As per the static structural dead weight analysis shown in figure 18 and figure 19, the deformation and equivalent stress of 9.0653 mm and 126.46 MPa were found respectively. The equivalent stress obtained is less than the allowable stress which is 137.8 MPa and thus the design is safe. But, sometimes the stress Concentration is one of the important factors to be studied in the pressure vessels openings, and nozzles are the openings in our case and needs to be taken care of [15].

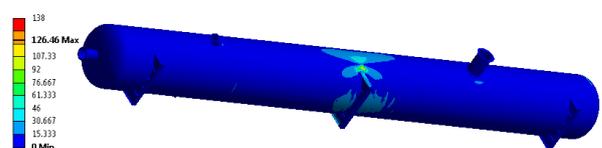


Figure 18: Equivalent Von Mises stresses for DWL conditions

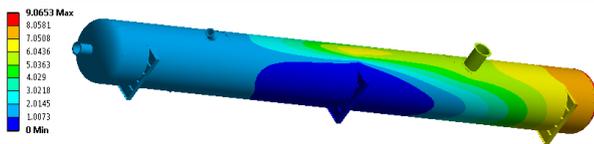


Figure 19: Total deformation for DWL conditions

Till now we have finalized the model and we are ready to proceed with the further analysis of the vessel with 12 mm thickness. In the next chapter, total 8 cases will be analyzed, 4 cases will be studied with the nozzles fixed as we have done in dead weight loading. In next 4 cases, nozzles will be kept free and results will be studied. We are actually looking for the stable model in terms of stresses and deformation having minimum localized stresses while the model is under the boundary conditions and this is our basic goal from this project. The critical zones are nozzle to vessel intersections because the stresses generated in those areas are much higher than the other areas of the vessel.

Till now we have finalized our model and its requirements to meet our requirements. We made it horizontal, added the saddle supports and came to the conclusion that we can proceed further for the analysis and it is now ready to study under our boundary conditions. Hence, in this chapter, we will be dealing with final analysis of the completely defined model while applying the boundary conditions. We will check the results we are getting from all the cases of the analysis process. If the results are satisfactory then we can proceed further for the conclusions. But if the results are poor as far as the stresses generated and the deformation is concerned, then we have to think of modification and optimization to the model.

**Boundary Conditions**

The boundary conditions applied to the model are

1. A pressure of 0.39632 MPa is applied to all internal surfaces of the pressurized section.
2. Acceleration due to gravity 9810 mm/s<sup>2</sup> is applied.
3. The temperature applied on the catalyst bed reactor section of the pressure vessel is 200C.
4. The middle saddle is fixed and displacement is given to end saddles.
5. The thickness of the vessel kept is 12 mm per the ASME section calculations.
6. All the nozzles are considered fixed for first four cases and then followed by free nozzles cases.

Our main focus for this analysis was to check the reports for the vessel and check the stability of the vessel in terms of stresses and deformation. Thus, the Equivalent Von Mises stresses and the deformation will be of the prime importance. If those are within the allowable values we can proceed with the nonlinear analysis and final conclusion for this model. But if it is not the case then we have to change the parameters of this model to get the required results and stabilize the model in terms of stresses and deformation.

**Analysis Phase**

The analysis will deliver eight results for 12 mm thickness with linear method. First four will be for fixed nozzles and the

next four will cover the free nozzles analysis reports. If the results are within the allowable stress values, then we can proceed for the nonlinear analysis otherwise we will go for thickness optimization in the next chapter and again will repeat the procedure until we find the stabilized vessel in terms of stresses and deformation.

Listed below are the inputs for the first four cases and their results with required snaps showing the deformation (DMX) and Equivalent Von Mises stresses values. These four results are found for fixed nozzle and the vessel is supported on the middle saddle.

**Analysis done for 12 mm thickness with nozzles fixed and results reported as below**

a] Temperature 200 degrees Celsius, Force 2000N  
Body sizing 40 mm, Thickness 12 mm for all components,  
Number of nodes 206871, elements 204896

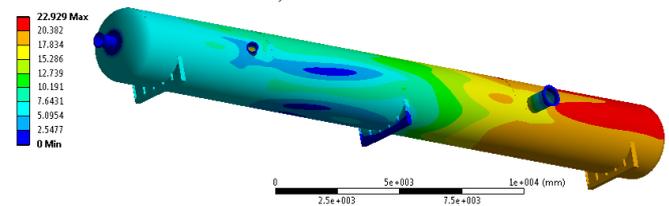


Figure 20: DMX 1  
DMX = 22.929 mm

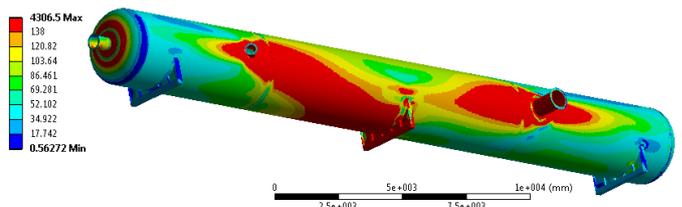


Figure 21: EVMS 1  
Equivalent Von Mises stresses = 4306.5 MPa

The above case shows the results are much above the allowable values of stress and deformation. The red zone is the indication for unstable zone of the vessel in terms of stresses and deformation. In the stress analysis image we can see that surface around the nozzles are more prone to higher values of stresses and thus the references we studied are going parallel with our analysis. The stresses are more concentrated near the nozzle and vessel junctions. As far as the values of stresses and deformation are concerned, it can be declared to be a failure and we need to study next results of fixed nozzles and free nozzles.

b] Body sizing 55 mm

Number of nodes 109921, elements 108233

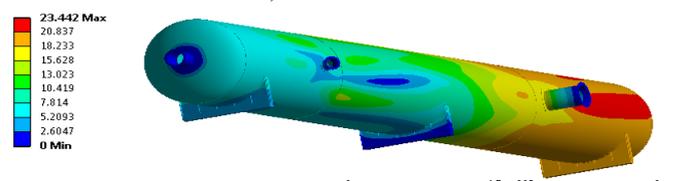


Figure 22: DMX 2  
DMX = 23.442 mm

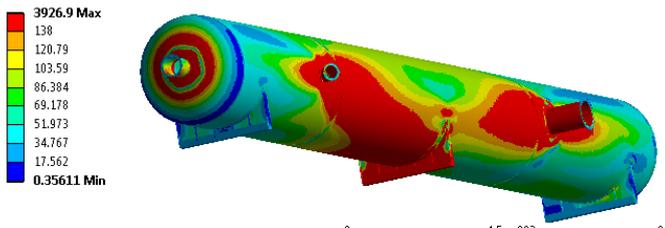


Figure 23: EVMS 2

Equivalent Von Mises stresses = 3926.9 MPa

By changing the body sizing we are reducing the number of nodes from 2 lacs to 1, 10,000 thousand and keeping the other boundary conditions as it is we will note the results. The maximum equivalent Von Mises stress found to be somewhat lesser than the previous case, but still the results are unacceptable as the allowable stress is much lower value than what we are getting.

c] Body sizing 60 mm

Number of nodes 92384, elements 90865

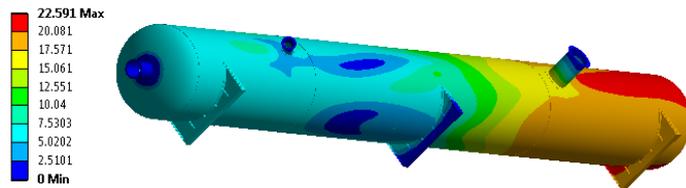


Figure 24: DMX 3  
 DMX = 22.591 mm

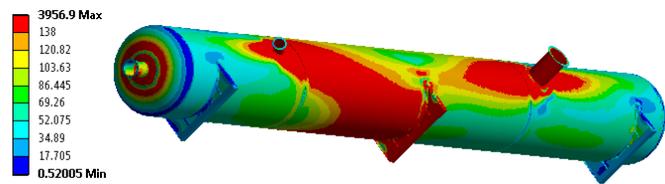


Figure 25: EVMS 3

Equivalent Von Mises stresses = 3956.9 MPa

The next optimization is done with further reducing the body sizing i.e. node numbers to around 90,000. No appreciable change in stress value is noticed and stress value is same as the previous case.

d] Body sizing 85 mm

Number of nodes 46914, Elements 45773

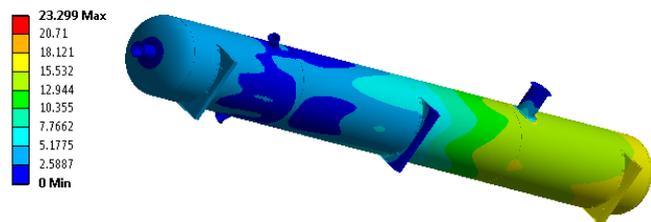


Figure 26: DMX 4  
 DMX = 23.299 mm

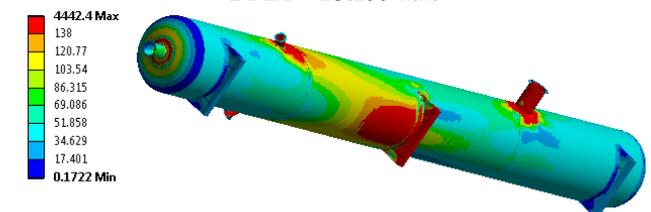


Figure 27: EVMS 4

Equivalent Von Mises stress = 4442.4 MPa

Looking at the final optimization of the fixed nozzle case, the values are much beyond the allowable values and we will run the optimization cases for free nozzle cases. In the 4<sup>th</sup> case, we can see that the stresses are getting uniform but the value cannot be entertained and hence we will move forward to our next cases of analysis.

**Analysis done for 12 mm thickness with nozzles free and results reported as below**

Listed below are the inputs for the next four cases of free nozzles. All the inputs will be the same as above with the only difference being the nozzles released free which means that the nozzles are free to have infinitesimal small movement in any direction. Their results with required snaps showing the deformation (DMX) and Equivalent Von Mises stresses values. Analysis results are found for free nozzles. All nozzles are free and the vessel is supported only on the middle saddle.

a] Temperature 200 degrees Celsius, Force 2000N, Thickness 12 mm for all components,

Body sizing 40 mm, Number of nodes 206871, Elements 204896

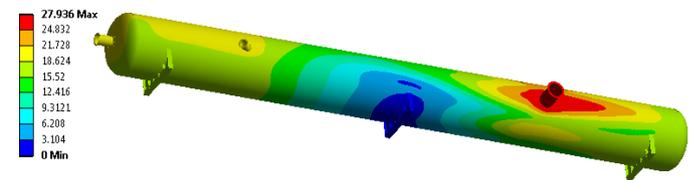


Figure 28: DMX 5  
 DMX = 27.936 mm

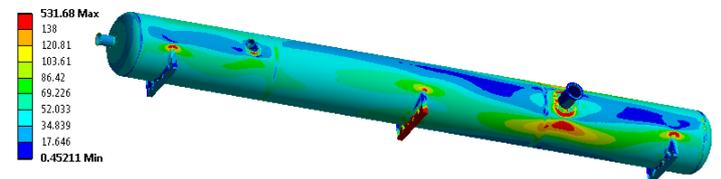


Figure 29: EVMS 5

Equivalent Von Mises stresses = 531.68 MPa

In the first case of free nozzles having 2 lacs of nodes, we can see the stress generated came down to 531.68 MPa which is very good improvement as far as the stresses are concerned. Again, uniform stress distribution is a noticeable change noted and a positive response. The deformation is still having a large value which is not acceptable. The maximum stress concentration found is near the nozzle-vessel junction and also near the saddle-vessel junction. Thus, the path of the results are going the right way but need to be taken care of.

b] Body sizing 55 mm, Number of nodes 109921, elements 108233

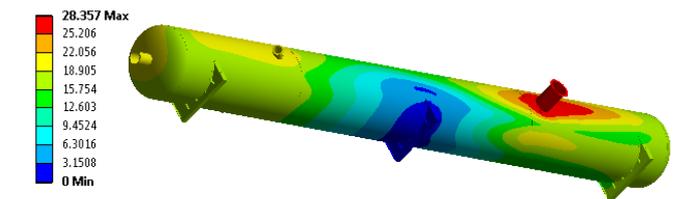


Figure 30: DMX 6  
 DMX = 28.357 mm

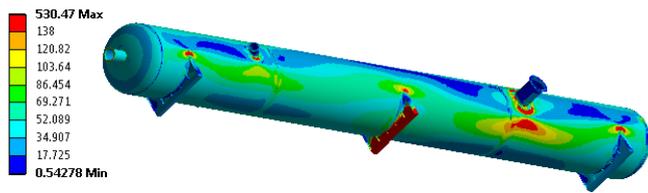


Figure 31: EVMS 6

Equivalent Von Mises stresses = 530.47 MPa

The results obtained are for body sizing 55 mm i.e. around 10,000 nodes. Not much variation is seen when we compare this case with the previous case of 2, 00,000 nodes. Deformation is slightly increased by 1 mm but the stress is reduced by 1 MPa. Next cases should analyzed for stresses and deformation.

c] Body sizing 60 mm, Number of nodes 92384, elements 90865

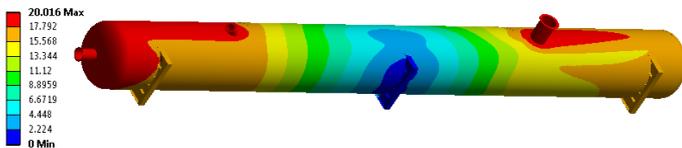


Figure 32: DMX 7

DMX = 20.016 mm

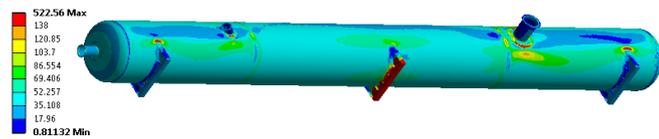


Figure 33: EVMS 7

Equivalent Von Mises stresses = 522.56 MPa

The stress is reduced again by around 8 MPa for 92000 nodes and deformation is also reduced by 8 mm. The area of concern are the junctions of nozzle and vessel. The remaining area shows the uniform stress distribution which can be seen by observing at the image. The middle saddle is fixed and hence it is taking all the load and it looks unstable in terms of stresses generated. If we increase the thickness of saddle it will reduce the stresses generated.

d] Body sizing 85 mm, Number of nodes 46914, elements 45773

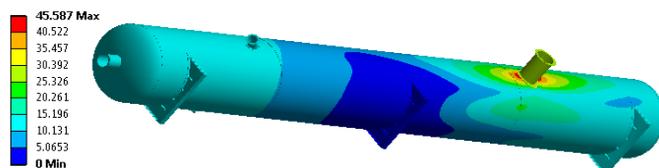


Figure 34: DMX 8

DMX = 45.587 mm

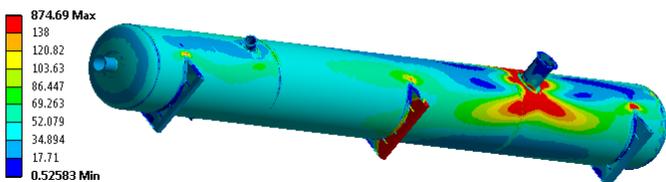


Figure 35: EVMS 8

Equivalent Von Mises stress = 874.69 MPa

The stress is increased significantly for 45,500 nodes and the deformation as well. And hence considering this case we have to move forward to next level of optimization. Thus, we will

have to keep the track of next series of results generated through the change of parameters and if it releases the instability of the stresses and deformation generated then it will help us to conclude this project.

The above cases were analyzed for 12 mm thickness and the results generated were not satisfactory in terms of stresses generated and the deformation. The Equivalent Von Mises stresses generated were much higher than the allowable stress values (138 MPa) when the model was analyzed for fixed nozzles cases and then sudden decrease was noted for free nozzles cases. The decrease is still much above the allowable stress values and it has to be lowered as we are getting higher stresses in some regions viz. regions of nozzles and vessel intersections. It is our prime focus to control these stresses. This means that we have to look beyond the calculated thickness as the results are poor. We have to reconsider the thickness parameter for this analysis as we cannot control the other parameters and hence it was then recommended to increase the thickness. Thus, the role optimization will be on the screen for the new thickness. The thickness recommended by the company was 30 mm. Thus, we now will be dealing with optimization concept.

## V. OPTIMIZATION

Optimization is done by trial and error method by changing thickness of pressure vessel. Design optimization is a technique that seeks to determine an optimum design. An optimum design means, one that meets all specified requirements but with a minimum expense of certain factors such as weight, surface area, volume, stress, cost, etc. in other words, the optimum design is usually one that is as effective as possible and meeting the requirements. Virtually any aspect of design can be optimized viz. dimensions, shape (fillet radii), and placement of supports and cost of fabrication, natural frequency, material property, and so on. The ANSYS program offers two optimization methods to accommodate a wide range of optimization problems.

1. The 'sub problem approximation method' is an advanced zero-order method that can be efficiently applied to most engineering problems.
2. The first order method is based on design sensitivities and is more suitable for problems that require high accuracy.

For both the sub problem approximation and first order methods, the program performs a series of analysis-evaluation-modification cycles. That is, an analysis of the initial design is performed, the results are evaluated against specified design criteria, and the design is modified as necessary. The process is repeated until all specified criteria are met.

In our case, we will be performing the single variable optimization method which comes under Classical optimization techniques. The thickness will be our variable which will be under consideration and we will optimize it for stabilizing the vessel.

### Trial considering thickness 30 mm while linear approach

The shell thickness was considered 12 mm for the start of the analysis of the project because it was theoretically calculated using the formulae from ASME sections for the pressure vessels. The results obtained were not satisfactory as the

deformations (DMX) and the equivalent Von Mises stresses generated were multiple times higher than allowable stresses and hence we have to make a move towards a new thickness so as to get the more better results which will satisfy our objective and stabilize the nozzle in terms of the stresses generated and minimum deformation.

Following are the cases studied for pressure vessel with 30 mm shell thickness. All nozzles are fixed and supported only on the middle saddle.

**Analysis done for 30 mm thickness with nozzles fixed**

a) Temperature 200 degrees Celsius,  
 Force 2000N, Body sizing 40 mm,  
 Number of nodes 206871, Elements 204896

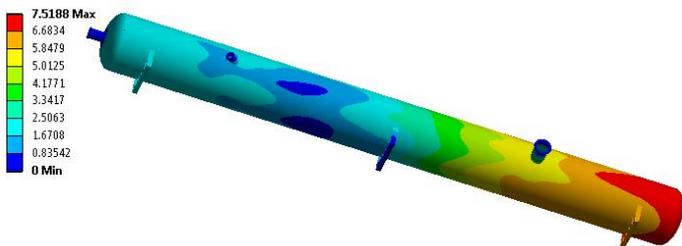


Figure 36: DMX 9  
 DMX=7.5188 mm

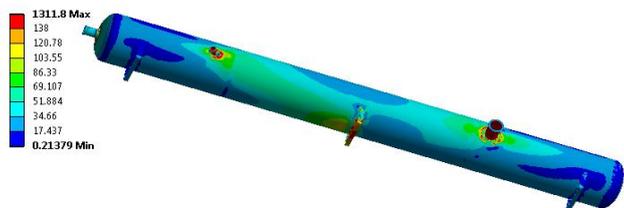


Figure 37: EVMS 9  
 Equivalent Von Mises stress = 1311.8 MPa

The first case for 30 mm fixed nozzles has much better deformation value which is satisfactory but the stresses generated are well above the allowable values. The stresses shows a uniform distribution pattern on the vessel, thus it looks like we are reaching our objective.

b) Body sizing 55 mm, Number of nodes 109921, elements 108233

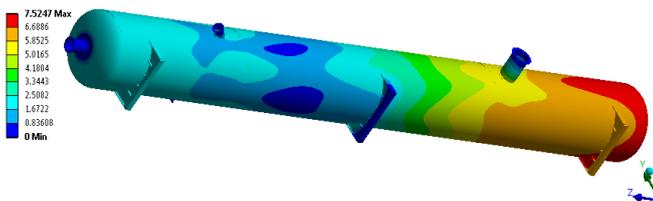


Figure 38: DMX 10  
 DMX=7.5247 mm

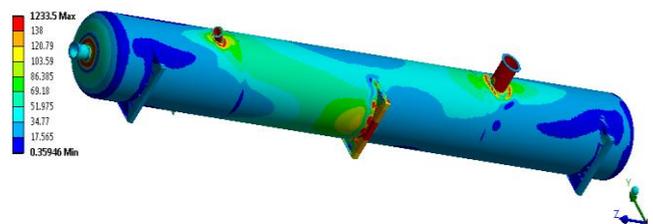


Figure 39: EVMS 10  
 Equivalent Von Mises stress = 1233.5 MPa

The deformation being almost the same but the stresses are lowered as compared to previous case.

c) Body sizing 60 mm, Number of nodes 92384, Elements 90865

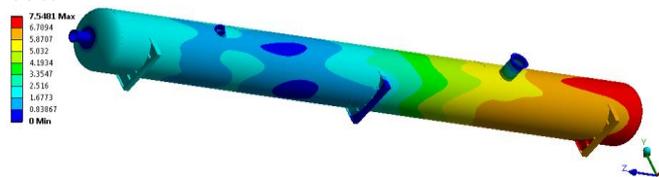


Figure 40: DMX 11  
 DMX = 7.5481 mm

The deformation again in the same range of 7.5 mm when we lowered the nodes to 92000. The stress is captured in the next snap.

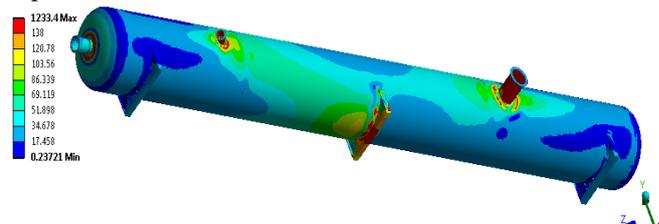


Figure 41: EVMS 11  
 Equivalent Von Mises stress = 1233.4 MPa

The stress is also came around the 1233.4 MPa which is following approximately the same range.

d) Body sizing 85 mm, Number of nodes 46914, elements 45773

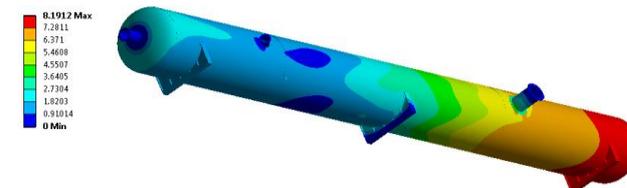


Figure 42: DMX 12  
 DMX = 8.1912 mm

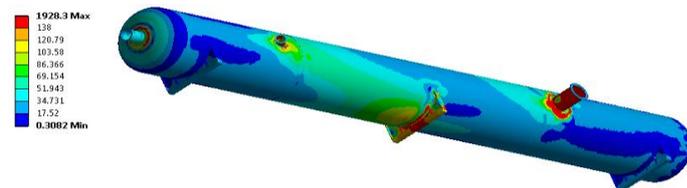


Figure 43: EVMS 12  
 Equivalent Von Mises stress = 1928.3 MPa

The deformation is increased with lowering the nodes, but the stress is significantly jumped to a higher value and thus, can be treated a failure. This range e of 46,000 nodes seems to be out of the required output range as far as the other three cases are concerned.

**Analysis done for 30 mm thickness with nozzles free**

a) Temperature 200 degrees Celsius,  
 Force 2000N, Body sizing 40 mm,  
 Number of nodes 206871, elements 204896

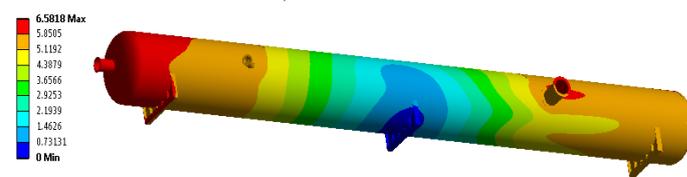


Figure 44: DMX 13  
 DMX=6.5818 mm

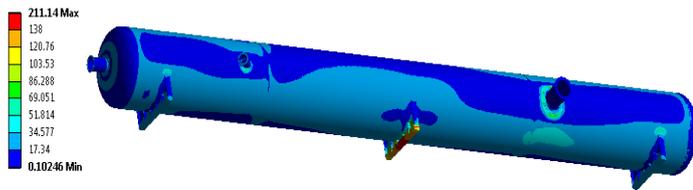


Figure 45: EVMS 13

Equivalent Von Mises stresses-214.14 MPa

For 2, 00,000 nodes the deformation found is 6.58 mm and the Equivalent Von Mises stresses is also marginally reduced to 214.14 MPa. This change is very much appreciable. The stress distribution is very well uniform as can be seen from the uniform. The value of stress 214.14 MPa is concentrated near the middle saddle which is fixed and taking all the load.

b) Body sizing 55 mm,  
Number of nodes 109921

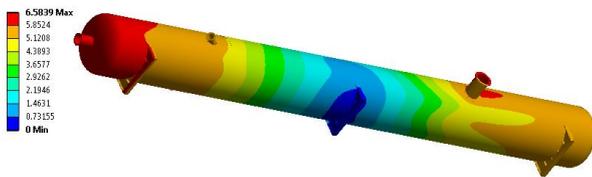


Figure 46: DMX 14  
DMX-6.5839 mm

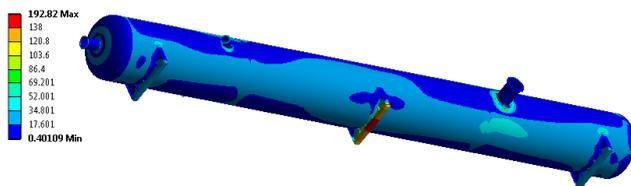


Figure 47: EVMS 14

Equivalent Von Mises stresses-192.82 MPa

The case of 1,00,000 nodes shows deformation with the same range as the previous case but the stress is decreased by 22 MPa, a noticeable reduction and a positive change.

c) Body sizing 60 mm,  
Number of nodes 92384,  
Elements 90865

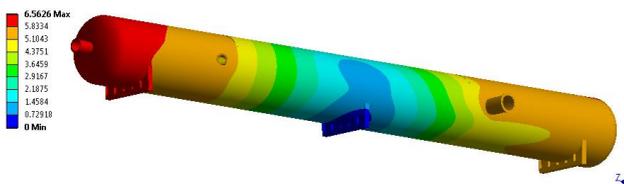


Figure 48: DMX 15  
DMX-6.5626 mm

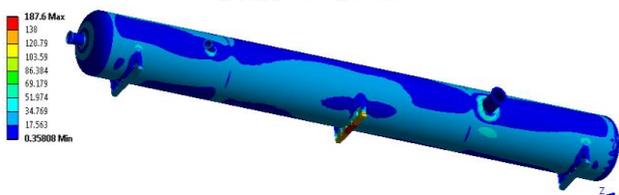


Figure 49: EVMS 15

Equivalent Von Mises stresses-187.6 MPa

The deformation is again having almost the same result but the value of stress is reduced by around 28 MPa compared with the first case. This is a significant reduction of the stress and thus, we are coming near to a more stabilized pressure vessel.

d) Body sizing 85 mm,  
Number of nodes 46933,  
Elements 45792

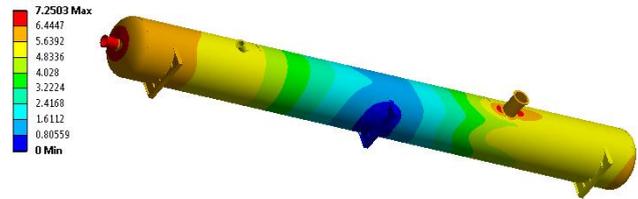


Figure 50: DMX 16  
DMX-7.2503 mm

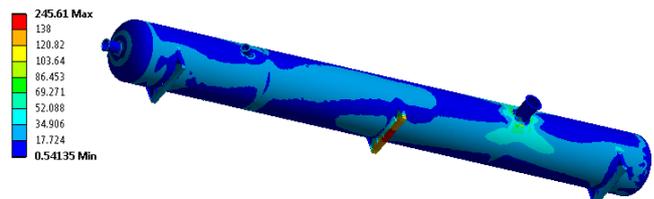


Figure 51: EVMS 16

Equivalent Von Mises stresses-245.61 MPa

As usual, the 46,000 nodes are showing deviation from the trend of results we are getting. The stress is increased by 30 MPa as compared to the 2, 00,000 nodes case. But the result will not be treated as a failure as the stress distribution is uniform across the vessel surface and thus can be accepted.

**Results for nonlinear analysis**

These four cases will study the analytical results for nonlinear analysis with 30 mm thickness keeping nozzles free. The values here generated for inputs listed below-

**Analysis done for 30 mm thickness with nozzles free**

a) Body sizing 40 mm, Nodes 206873, Elements 204898  
Temp- 200 degrees Celsius, Force - 2000 N  
Pressure- 0.396321 MPa from inside

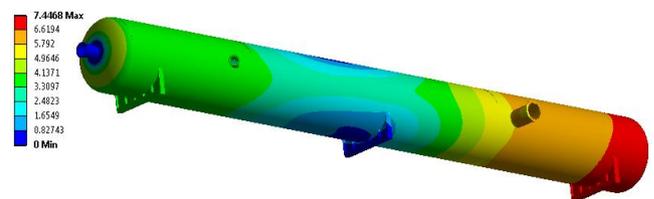


Figure 52: DMX 17  
DMX- 7.4468 mm

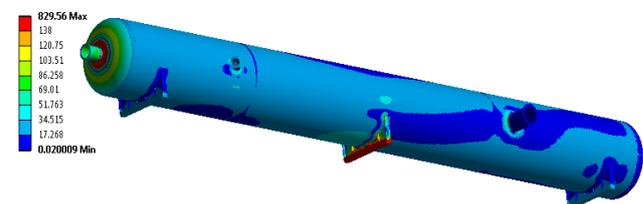


Figure 53: EVMS 17

Equivalent Von Mises stress 829.56 MPa

The nonlinear analysis takes a longer period than the linear one to run the cases. The deformation is increased by 1 mm and also there is a noticeable change in the Equivalent Von Mises stress and for 2, 00,000 nodes it is around 830 MPa. But the values of these stresses are found on some of the nozzle to vessel junctions otherwise the vessel seems stress-free as we look at the image.

b) Body size 50 mm,

Nodes-120798, Elements- 118939

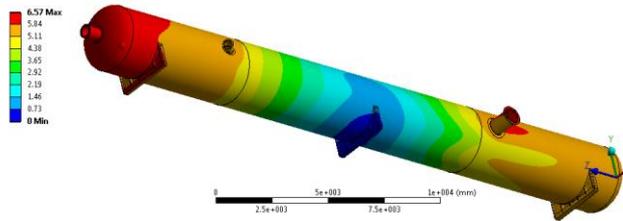


Figure 54: DMX 18  
 DMX - 6.57 mm

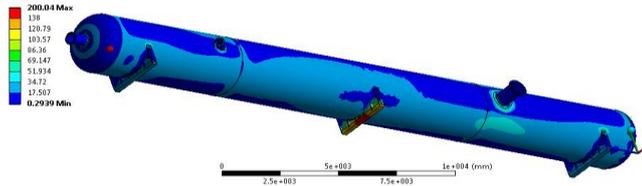


Figure 55: EVMS 18

Equivalent Von Mises stress -200.04 MPa

Bringing down the nodes to 1, 20,000, we found that the stress is significantly reduced and its value comes down to 200 MPa. As far as the deformation is concerned, it is also gone down to 6.57 mm and a positive reduction.

c] Body sizing 60 mm, Nodes 92384, Elements 90865

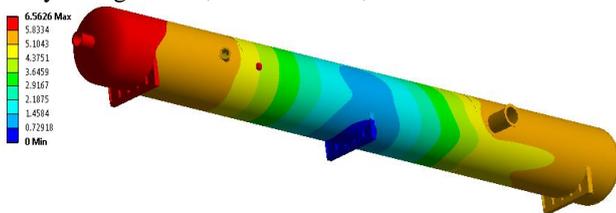


Figure 56: DMX 19  
 DMX = 6.5626 mm

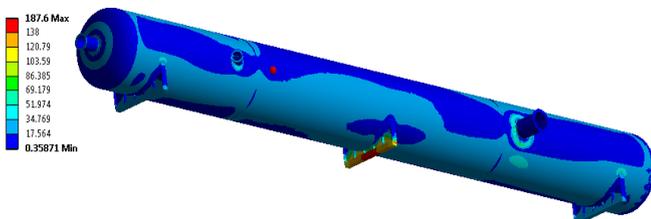


Figure 57: EVMS 19

Equivalent Von Mises stress = 187.6 MPa

Further reduction in node numbers is bringing the stress to again a lower value and it shows a value of 187.6 MPa. The deformation is also following allowable value with a magnitude 6.5626 mm.

d] Body sizing 85 mm,

Nodes 46911, Elements 45769

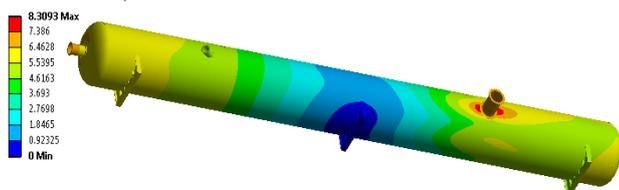


Figure 58: DMX 20  
 DMX - 8.3093 mm

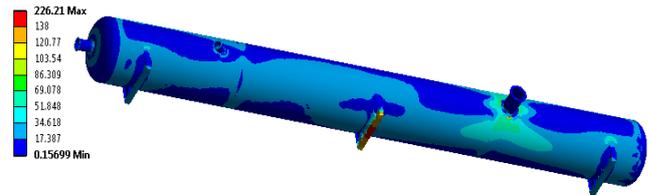


Figure 59: EVMS 20

Equivalent Von Mises stress- 226.21 MPa

With previous experience of the increasing trend of the value of stresses generated and the deformation formed, we are getting the same result for nonlinear analysis of the 46,000 nodes and the result is satisfactory with stress being equal to 226.21 MPa and deformation magnitude is equal to 8.3093 mm. Both these values are within the respective allowable zone. The vessel looks stable as far as the stresses are concerned, the only concern being the middle saddle which needs special care to be taken while manufacturing. From the above iterations, it was learnt that the vessel with thickness 30 mm is more stable in terms of stresses generated, deformation at various sections of the vessel. Again, it was found that the vessel with free nozzles are having more stabilized, uniformly distributed and safe results than that for vessel with fixed nozzles. Now, it can be considered to be an optimum design.

Thus, from the above analysis it is reflected that, 30 mm thickness will work far better than the theoretical 12 mm thickness and hence we can proceed with the same. The nozzles added for the purpose of speeding up the flow of the reaction can now considered to be safe for the operation of catalyst bed reactor vessel.

The above images also tells us that the cases with free nozzles are having Von Mises stresses generated less than 400 MPa and are much uniform than for the fixed nozzles. The stresses in the range of allowable stress value (414 MPa) for some zones of vessel like middle saddle base.

#### ACKNOWLEDGMENT

It gives me great pleasure to present a project report on "Finite Element Analysis and Optimization of Catalyst Bed Reactor Vessel". In preparing this paper number of hands helped me directly and indirectly. Therefore it becomes my duty to express gratitude towards them.

I wish to express sincere thanks to my project guide Prof. N. H. Ambhore for valuable guidance and encouragement. His inspiration constantly endeavors co-operation in analyzing the documents, data and helped us a lot to complete my project stage I successfully in time.

I am also thankful to Prof. V. R. Bajaj (Head, Department of Mechanical Engineering) and other staff member for kind co-operation and providing me all facilities required.

I am highly grateful to Principal Prof. Dr. S. B. Padwal who had given permission to use required college facilities.

Last but not the least, this acknowledgement would be incomplete without rendering to Mr. Vinaay Patil & Mr. Manan Panchal who helped me in manufacturing and Quality testing of project.

REFERENCES

Papers from Journal or Transactions

- [1] S. Ravinder, S. Prakash, S.V. Vijay Kumar Raju, S. Raju, P. Janaki Ramulu, "Design and Analysis of Pressure Vessel Assembly for Testing of Missile Canister Sections Under Differential Pressures", *Procedia Engineering, International Conference on Design and Manufacturing*, 2013, Volume 64, pp.1040–1047
- [2] L. P. Anatalffy, G. A. Miller, K. D. Kirkpatrick, A. Rajguru and Y Zhu, "Design consideration for the erection of heavy wall and large diameter pressure vessel", *Procedia engineering, International conference on pressure vessel technology*, 2015, pp.17-31
- [3] A. Th. Diamantoudis and Th. Kermanidis, "Design by analysis versus design by formula of high strength steel pressure vessels: a comparative study", *International Journal of Pressure Vessels and Piping* 82, 2005, pp. 43–50
- [4] Shyam R. Gupta, Chetan P. Vora, "Study of Pressure Vessel Design and Analysis", *International Journal of Engineering Research & Technology (IJERT)*, Mar-2014, ISSN 2278-0181, Volume 3, Issue 3
- [5] Bhavik Desai, "Design Automation Nozzle Reinforcement Analysis for Pressure Vessel", *International Journal of Innovative Research in Advanced Engineering (IJIRAE)*, September 2014, ISSN 2349-2163, Volume 1, Issue 8
- [6] Ming-Hsien Lu, Jiun-Shya Yu & Jien-Jong Chen, "The effect of analysis model on the stress intensity calculation for the nozzle attached to pressure vessel under internal pressure loading", *International Journal of Pressure Vessels and Piping*, 2014, pp. 9-16
- [7] J. S. Liu, G.T. Parks & P.J. Clarkson, "Shape optimization of axi-symmetric cylindrical nozzles in spherical pressure vessels subject to stress constraints", *International Journal of Pressure Vessels and Piping*, 2000, volume 78 issue 1
- [8] Jerzy Lewinski, "Equivalent stress in a pressure vessel head with a nozzle", *Journal of theoretical and applied mechanics*, 2014, 52, 4, pp. 1007-1018
- [9] Usman Tariq Murtaza, M. Javed Hyder, "Optimization of the size and shape of the set-in nozzle for a PWR reactor pressure vessel", *Nuclear Engineering and Design* 284, 2015, pp. 219–227
- [10] V. N. Skopinsky, A. B. Smetankin, "Modelling and Stress Analysis of Nozzle connections in Ellipsoidal heads of Pressure vessels under external loading", *International Journal of Applied Mechanics and Engineering*, 2006, Volume 11, No.4, pp. 965-979
- [11] A. M. Senthil Anbazhagan, M. Dev Anand & G. Anis Milton, "Development of Finite Element Based Wind and Seismic Design Procedure for Horizontal Pressure vessel", *Procedia Engineering*, 2012, Volume 38, pp. 3998–4004
- [12] J. Fang, Q.H. Tang & Z.F. Sang, "A comparative study of usefulness for pad reinforcement in cylindrical vessels under external load on nozzle", *International Journal of Pressure Vessels and Piping* 86, 2009, pp. 273–279
- [13] Sudeep Zirmire, R. S. Tajane, "A Review on Butane Separator Analysis", *International Journal of Research in Mechanical Engineering and Technology*, May -October 2014, Volume 4, Issue 2
- [14] You Hong Liu, Bing-Sheng Zhang, Ming De Xue, & You Quan Liu, "Limit pressure and design criterion of cylindrical pressure vessels with nozzles", *International Journal of Pressure Vessels and Piping* 81, 2004, pp. 619–624
- [15] Avinash Kharat, V. V. Kulkarni, "Analysis of Stress Concentration at Opening in Pressure Vessels using

- ANOVA", *International Journal of Research in Engineering and Technology*, pISSN pp. 2321-7308
- [16] Vijay Kumar and Pradeep Kumar, "Mechanical Design of Pressure Vessel using PV-ELITE software", *International Journal of Scientific and Research Publications*, April 2014, ISSN 2250-3153, Volume 4, Issue 4
- [17] Mr. Ganesh R. Mane, Prof. G. V. Shah, "FEA Based Comparative Evaluation of Nozzles and Their Location on Structural Performance of Pressure Vessel", *International Journal of Emerging Trends in Engineering and Development*, June –July 2014, Issue 4, Volume 4 ISSN, pp. 2249-6149
- [18] Vishal V. Saidpatil and Prof. Arun S. Thakare, "Design & Weight Optimization of Pressure Vessel Due to Thickness Using Finite Element Analysis", *International Journal of Emerging Engineering Research and Technology*, June 2014, ISSN 2349-4395, Volume 2, Issue 3, PP 1-8
- [19] Pravin Narale and Prof. P. S. Kachare, "Structural Analysis of Nozzle Attachment on Pressure Vessel Design", *International Journal of Engineering Research and Applications (IJERA)*, July-August 2012, Volume 2, Issue4, ISSN: 2248-9622, pp.1353-1358
- [20] Nitin V. Titave, Dr. Satishchandra V. Joshi, Vinay Patil, "Structural Analysis of Partitioned Vertical Column", *International Journal of Modern Engineering Research (IJMER)*, Sep.-Oct. 2012, Volume 2, Issue 5, pp. 4360-4362
- [21] Amran Ayob, Noraziah Wahi and M Kabashi Elbasheer, "Effect of Optimum Autofrettage on Pressure Limits of Thick-Walled Cylinder", *International Journal of Environmental Science and Development*, August 2011, Volume 2, No. 4

Reports, Handbooks etc.

- [22] Pressure Vessel Engineering Ltd, Finite Element Analysis & ASME Code Calculations Handbook, Feb-2009.

Reference Books

- [23] M. V. Joshi, Process Equipment Design, Macmillan Company of India ltd, India, 1976, pp. 402-404.